

SKOV

designers floor



## Welcome to Skov Floors

We specialise in premium wide-board floors that are durable, elegant and distinctive, that will enhance the look of both contemporary architectural spaces and traditional homes. We also offer an exclusive range of matching solid oak mouldings and trims, enabling our floor boards to be utilised across a unique and stunning array of applications including ceilings, walls and cabinetry, for a look only limited by your imagination.

Being the choice of leading architects and designers, you can be assured that we use only the world's most beautiful timbers and the world's leading manufacturers, and therefore only sell the highest quality products available.

Using a range of beautiful timbers, we then create special finishes and colours tailored to the Australian market, that offer a distinct colour choice to local species and which are simply not achievable with on-site finishing. We highlight the natural beauty of each species – grain characteristics, tonal variation, medullary ray, knots, swirls and birds eye are some of the typical features you can expect to see.







# Architect Collection

Engineered Oak.

220 wide x 2200 long x 20 thick (6mm oak layer)

190 wide x 1900 long x 15 thick (4mm oak layer)

120 wide x 600 long x 15 thick (3mm oak layer)  
*(Herringbone)*

125 wide x 770 long x 15 thick (3mm oak layer) *(Chevron panel)*

Product is a mixed grade of ABCD which means that some boards will be clean and others will have knots and feature.



1043 light brushed.



1048 smoked



1051 light Smoked.



1002 limed




1049 light smkoed





1062 limed & smkoed



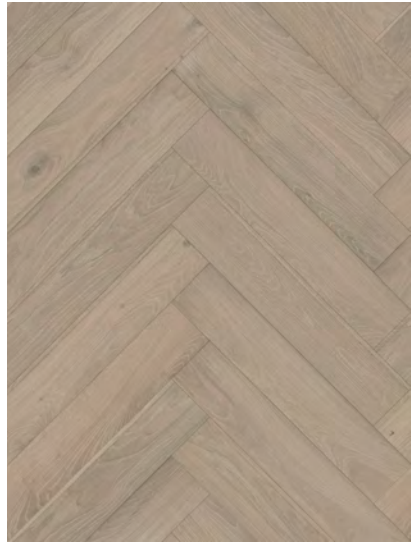

herringbone | chevron

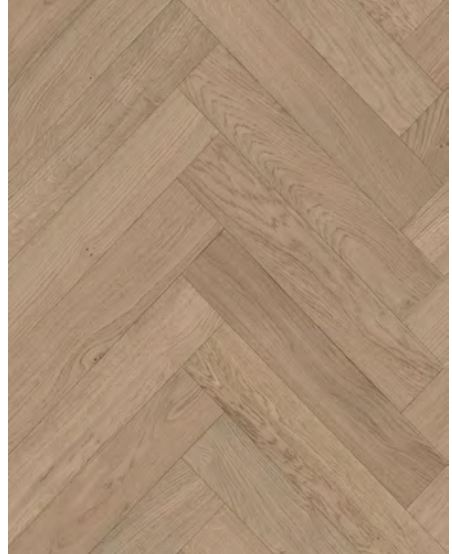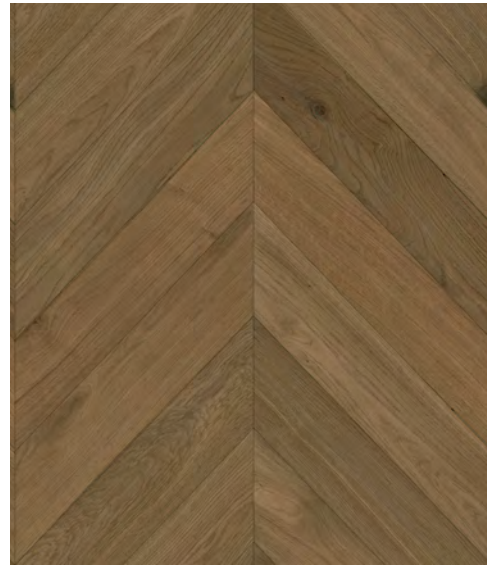



# Artisan Collection

Oak.  
Board dimensions:  
190 wide x 1900 long x 15 thick



1022 light brushed




3004 smoked




3001 light brushed



3003 light brushed

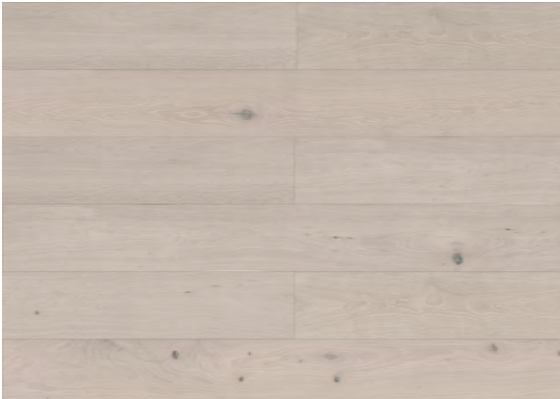


3007 brushed

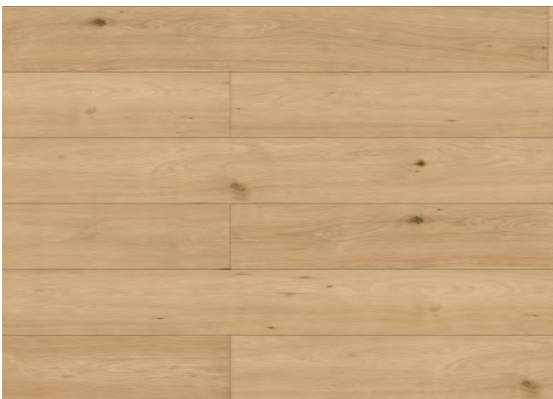

3005 light brushed




3011 smkoed

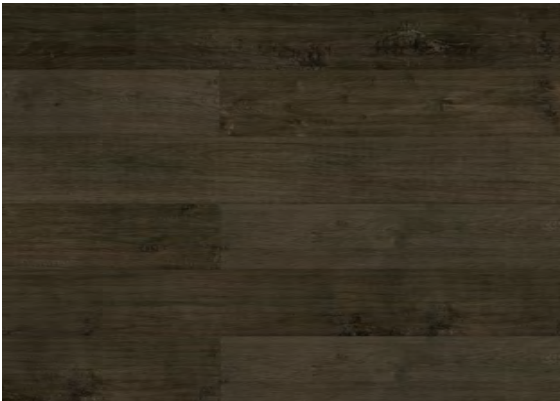


3009 smkoed



3008 limed&smoked

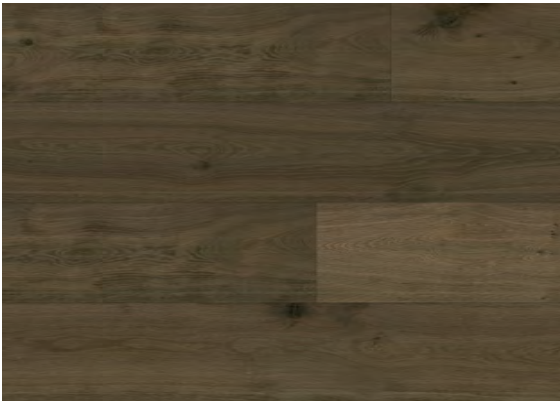

3012 smkoed

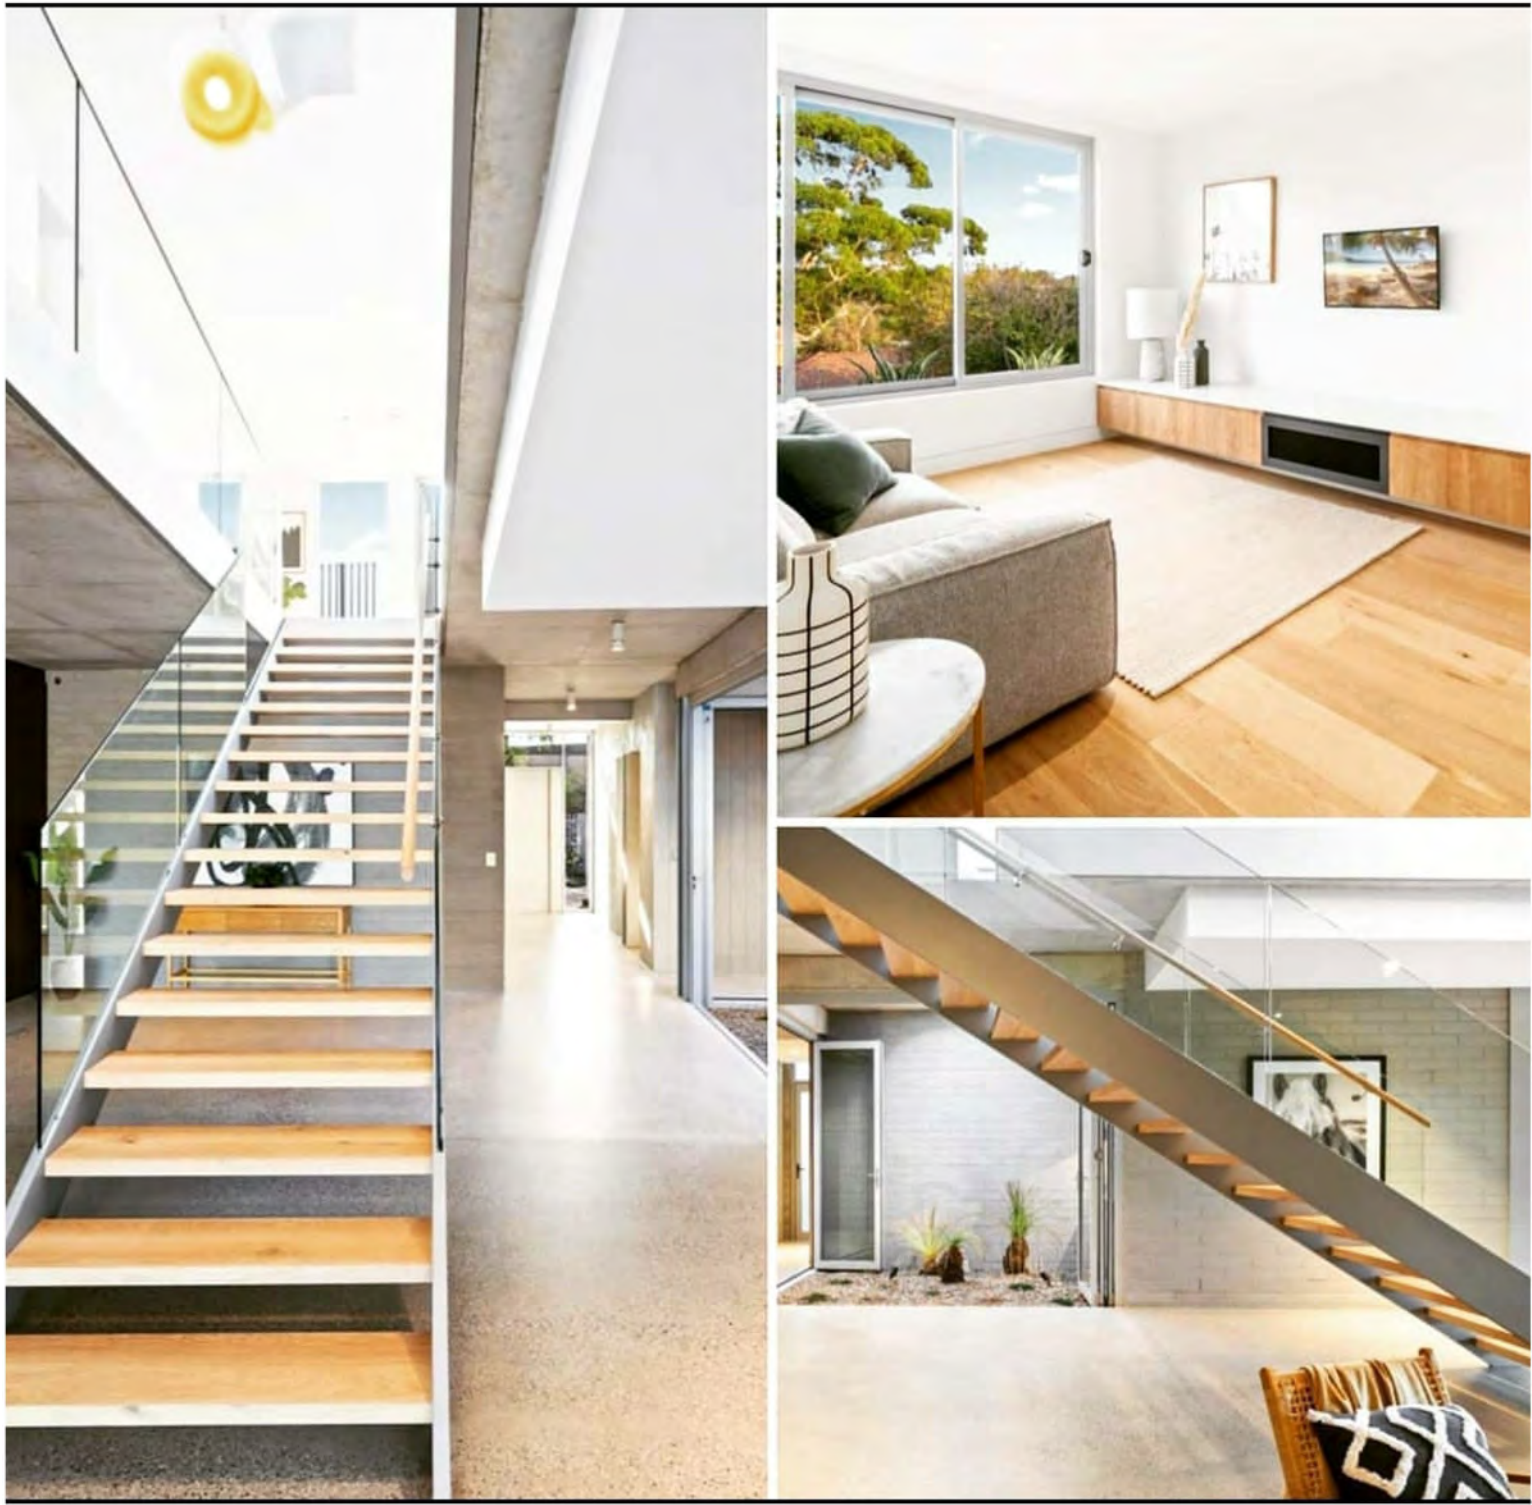



## Native Collection

board demension: 180 wide 1850 long 14 thick



blackbutt



spotted gum










## Board Profiles

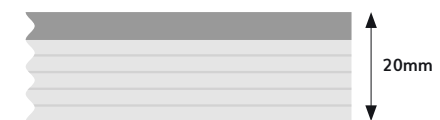


**20mm** – multiply construction.  
6mm Oak Layer with 14mm base.



**15mm** – 3 layer construction.  
4mm Oak Layer with 11mm base.

Please contact us to discuss your requirements of customization

## Engineered Stair Nosings

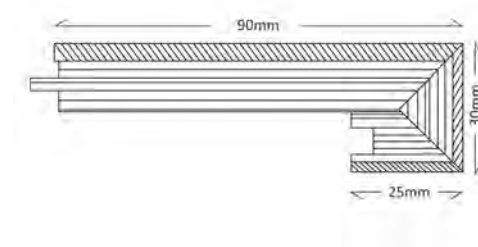





## What is an engineered floor?

An engineered floor is simply one that uses floor boards made up of more than one piece of timber. The multi-plywood product uses thinly cut hardwood and softwood plantation timbers, placed and glued in multiple directions to bolster the strength and stability of the top layer of solid timber. Engineered timber flooring technology has developed greatly during the past 25 years and has dramatically improved the quality of timber flooring products in that time.



## Engineered floors – pro's over solid floors

- Far greater stability means less floor failures than with solid floors.
- Wider board widths achievable with the inherent stability of a multi-plywood base.
- Has a thicker 'wear' layer and can be refinished without the need to sand.
- Available in a range of pre-finished, hard-to-achieve colours.
- Far lower VOC (volatile organic compounds) emissions once installed, compared with on-site finishing.
- Reduced installation time due to pre-finished product.
- Far more efficient use of slow-growing top layer timbers than with solid floors.
- Can be secret nailed or just glued down unlike solid boards which, if more than 90mm wide, require top nailing.
- Can be used in conjunction with in-slab and other sub-floor heating systems.
- We will buy back any unused, unopened stock left over from your project (certain conditions may apply).

## Installation

Skov Floors can be laid in the following manner:

### Concrete sub- floors

- Directly stuck and weighted to a level slab. This method should also be used if sub-floor heating is below.
- Glued and secret nailed on to 9mm or thicker pinned ply.
- Glued and weighted on to glued acoustic mats.

### Timber joist sub-floors

- Glued and secret nailed on to structural ply laid over joists.

### Walls

- Glued and secret nailed or just secret nailed on to ply-lined walls. Use matched pre-finished solid corner moulding for corners.

For a full installation guide please refer to our website.



302 Penshurst St, North Willoughby, NSW 2068 Australia  
T: 02 8872 4409 E: [sales@skov.com.au](mailto:sales@skov.com.au)

[www.skov.com.au](http://www.skov.com.au)